



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B32B 27/36, 27/08, C08L 67/02	A1	(11) International Publication Number: WO 99/48685 (43) International Publication Date: 30 September 1999 (30.09.99)
(21) International Application Number: PCT/US99/04542 (22) International Filing Date: 2 March 1999 (02.03.99) (30) Priority Data: 09/046,878 24 March 1998 (24.03.98) US (71) Applicant: GENERAL ELECTRIC COMPANY [US/US]; 1 River Road, Schenectady, NY 12345 (US). (72) Inventors: MACGREGOR, Amy, Kathleen; 46 Whirlaway Boulevard, Gansevoort, NY 12831 (US). HOFFFLIN, Frank, A.; 1512 Irvington Avenue, Evansville, IN 47712 (US). AYERS, Cecil, Edward; 4400 McKinnies Road, Mount Vernon, IN 47620 (US). LEGRAND, Donald, George; 5 Kevin Drive, Burnt Hills, NY 12027 (US). GILLETTE, Gregory, Ronald; 2 Dyer Drive, Clifton Park, NY 12065 (US). PICKETT, James, Edward; 4331 Buck- ingham Drive, Schenectady, NY 12304 (US). SEEGER, George, Thomas; 263 Washout Road, Scotia, NY 12302 (US). LILLY, Kenneth; 304 Key West Drive, Evansville, IN 47712 (US). (74) Agents: WINTER, Catherine, J. et al.; General Electric Company, 3135 Easton Turnpike W3C, Fairfield, CT 06431 (US).		(81) Designated States: IN, JP, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>
(54) Title: MULTILAYER PLASTIC ARTICLES (57) Abstract Multilayer plastic composite articles comprising a thermoplastic resin substrate which can be a polycarbonate, an ABS or ASA resin, a polyphenylene ether or polyphenylene ether/polystyrene blend, a polyester or an admixture of polycarbonate with ABS, ASA or polyester and at least one surface layer comprising a cycloaliphatic polyester or cycloaliphatic polyester blend which is adherent to at least one surface of the substrate. Decorative layers can be located between the substrate and the surface layers.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

MULTILAYER PLASTIC ARTICLES

FIELD OF THE INVENTION

This invention is directed to multilayer plastic articles, their properties and methods for making such articles. More particularly the articles comprise a substrate or base layer of an injection molded, blow molded or extruded thermoplastic and a top and/or bottom layer of acycloaliphatic polyester.

BACKGROUND OF THE INVENTION

There is substantial commercial interest in the use of plastic materials in various product forms such as sheet, film, shaped products, thermoformed articles, packaging, and architectural products. Many different plastics are used for such products in order to take advantage of particular physical, chemical, and mechanical properties.

SUMMARY OF THE INVENTION

Thermoplastic resins are provided with a surface film which improves weatherability, and solvent resistance, and which can be used to modify the color and appearance of the thermoplastic material. The surface film comprises a thin film of a cycloaliphatic polyester which is applied to the thermoplastic substrate by lamination, coextrusion or by an in-mold process known in the art as "in-mold decoration" in which the surface film is placed in the mold and the thermoplastic melt, which forms the substrate or base layer, is injection molded to the exposed surface or surfaces of the film.

The substrate or base layer can be any suitable thermoplastic resin including polycarbonates; polyesters; acrylonitrile-butadiene-styrene resins, referred to as ABS resins; acrylonitrile-styrene-acrylate resins, referred to as ASA

resins, a polyphenylene ether or polyphenylene ether/polystyrene blend and blends comprising polycarbonate in a mixture with one or more ABS, ASA or polyester resins

In one embodiment of the invention a cycloaliphatic polyester layer can be
5 laminated or adhered to both sides, i.e., top and bottom of the injection molded substrate, thereby making a three layer structure in which the substrate is protected on both sides by the same or different cycloaliphatic polyester layers. Various intermediate layers can be applied for decorative or functional purposes, or the cycloaliphatic polyester resin itself can be colored or modified to be the
10 decorative layer.

The structures of this invention can be transparent, opaque, or non-transparent, or combinations of transparent and opaque layers as desired. Transparent products are a preferred embodiments of this invention. The composite multilayered structure or article can be stabilized by inclusion of ultra
15 violet or infrared absorbing additives.

The invention provides articles comprising a thermoplastic substrate or base, preferably a polycarbonate resin or polycarbonate blend with other resins, and at least one surface layer comprised of a cycloaliphatic polyester or a blend of polycarbonate and cycloaliphatic polyester. The substrate can have a surface
20 layers on both sides. The base and surface layers can be provided with compatible functional additives.

DETAILED DESCRIPTION

Polycarbonates (PC) for use in the production of the multilayered articles of the invention are thermoplastic, aromatic polymers and include homopolycarbonates, copolycarbonates and copolyestercarbonates and mixtures
25 thereof which have average molecular weights of about 8,000 to more than

200,000, preferably of about 20,000 to 80,000 and an intrinsic viscosity (I.V.) of 0.40 to 1.5 dl/g as measured in methylene chloride at 25° C. In one embodiment, the polycarbonates are derived from dihydric phenols, or bisphenols, and carbonate precursors.

5 Polycarbonates are a well known class of high impact resistant thermoplastic resins characterized by optical clarity and high ductility. One of the most important engineering thermoplastics in use today are the polycarbonates. Polycarbonates can be defined as polymers containing recurring carbonate groups (-O-CO-O-) in the main chain. Aromatic polycarbonates are of particular interest in the practice of this invention. These polymers are known
10 per se and are generally prepared by reacting a dihydric phenol, or bisphenol, with a carbonate precursor, e.g., phosgene, a halogen formate, or a carbonate ester.


Aromatic polycarbonates comprise multiple structural units represented
15 by the formula:



Formula 1

wherein A¹ is a divalent aromatic hydrocarbon radical. Suitable aromatic hydrocarbon radicals for inclusion as A¹ include m-phenylene, p-phenylene, 4,4'-biphenylene, 4,4'-bi(3,5-dimethyl)-phenylene, 2,2-bis(4-phenylene)propane
20 and similar radicals such as those which correspond to the dihydroxy-substituted aromatic hydrocarbons disclosed by name or formula in U.S. Patent 4,217,438.

The A¹ radical preferably has the formula:



Formula 2

wherein each of A^2 and A^3 is a mono cyclic divalent aromatic hydrocarbon radical and Y is a bridging hydrocarbon radical in which one or two atoms separate A^2 from A^3 . The free valence bonds in formula 2 are usually in the meta or para positions of A^2 and A^3 in relation to Y. Compounds in which A^1 has formula 1 are bisphenols, and for the sake of brevity the term "bisphenol" is sometimes used herein to designate the dihydroxy-substituted aromatic hydrocarbons; it should be understood, however, that non-bisphenol compounds of this type may also be employed as appropriate.

10 In formula 2, the A^2 and A^3 values may be unsubstituted phenylene or hydrocarbon-substituted derivatives thereof, illustrative substituents (one or more) being alkyl and alkenyl. Unsubstituted phenylene radicals are preferred. Both A^2 and A^3 are preferably p-phenylene, although both may be o- or m-phenylene or one o- or m-phenylene and the other p-phenylene.

15 The bridging radical, Y, is one in which one or two atoms, preferably one, separate A^2 from A^3 . Illustrative radicals of this type are methylene, cyclohexylmethylene, 2-[2.2.1]-bicycloheptylmethylene, ethylene, isopropylidene, neopentylidene, cyclohexylidene, cyclopentadecylidene, cyclododecylidene and adamantylidene; gem-alkylene (alkylidene) radicals are preferred. Also included, however, are unsaturated radicals. For reasons of availability and particular suitability for the purposes of this invention, the preferred bisphenol is 2,2-bis(4-hydroxyphenyl)propane ("bisphenol A"), in which Y is isopropylidene and A^2 and A^3 are each p-phenylene.

Cycloaliphatic polyesters suitable for use in the present invention are those which are characterized by optical transparency, improved weatherability compared to the substrate alone, chemical resistance, and low water absorption. The cycloaliphatic polyester layers also have good melt compatibility with the substrate resins allowing easy recycling of the multilayer structures by simply re-melting the multilayer article and reforming one of the layers as a combination of the substrate layer and the cycloaliphatic cap layer. Other cap layers, for instance chlorinated polyolefins may react on re-melting causing degradation of the substrate resin particularly if the substrate resin is a high melting condensation polymer like polycarbonate. This compatibility of the cap layer and the substrate of the multilayered articles of this invention allows recycling of scrap during manufacture or simple recovery of the resins after the useful lifetime of the article. This is especially beneficial in articles containing polycarbonate or polycarbonate blends.

Cycloaliphatic polyesters useful in the practice of the invention are prepared by reaction of a diol with a dibasic acid or derivative.

The diols useful in the preparation of the cycloaliphatic polyester resins for use as the surface films of the present invention are straight chain, branched, or cycloaliphatic, preferably straight chain or branched alkane diols, and may contain from 2 to 12 carbon atoms. Examples include, but are not limited to, ethylene glycol, propylene glycol, i.e., 1,2- and 1,3-propylene glycol, butane diol, i.e., 1,3- and 1,4-butane diol, diethylene glycol, 2,2-dimethyl-1,3-propane diol, 2-ethyl, 2-methyl, 1,3-propane diol, 1,3- and 1,5-pentane diol, dipropylene glycol, 2-methyl-1,5-pentane diol, 1,6-hexane diol, 1,4-cyclohexane dimethanol and particularly its cis- and trans-isomers, triethylene glycol, 1,10-decane diol, and mixtures of any of the foregoing. Particularly preferred is dimethanol bicyclo octane, dimethanol decalin, a cycloaliphatic diol or chemical equivalent thereof and particularly 1,4-cyclohexane dimethanol or its chemical equivalents are to be

used as the diol component, it is preferred that a mixture of cis- to trans-isomer thereof, ranging from 1:4 to 4:1, and preferably, a ratio of about 1:3 is used. Chemical equivalents to the diols include esters, such as dialkylesters, diaryl esters, and the like.

5 The diacids useful in the preparation of the cycloaliphatic polyester resins of the present invention are aliphatic diacids. This is meant to include carboxylic acids having two carboxyl groups each of which is attached to a saturated carbon in a saturated ring. A preferred diacid is 1,4-cyclohexanedicarboxylic acid and most preferred is trans-1,4-cyclohexanedicarboxylic acid as further explained
10 above. Other cycloaliphatic acids include decahydro naphthalene dicarboxylic acid, norbornene dicarboxylic acids, bicyclo octane dicarboxylic acids. Linear aliphatic diacids are also useful provided the polyester has at least one monomer containing a cycloaliphatic ring. Illustrative examples of linear aliphatic diacids are succinic acid, adipic acid, dimethyl succinic acid, and azelaic acid.

15 Mixtures of diacid and diols may also be used to make the cycloaliphatic polyesters of the invention.

Cyclohexanedicarboxylic acids and their chemical equivalents can be prepared, for example, by the hydrogenation of cycloaromatic diacids and corresponding derivatives such as isophthalic acid, terephthalic acid of
20 naphthalenic acid in a suitable solvent, water or acetic acid at room temperature and at atmospheric pressure using suitable catalysts such as rhodium supported on a suitable carrier of carbon or alumina. See, Friefelder et al., *Journal of Organic Chemistry*, 31, 34-38 (1966); U.S. Patent Nos. 2,675,390 and 4,754,064. They may also be prepared by the use of an inert liquid medium in which a acid is at least
25 partially soluble under reaction conditions and a catalyst of palladium or ruthenium in carbon or silica. See, U.S. Patent Nos. 2,888,484 and 3,444,237.


Typically, during hydrogenation, two or more isomers are obtained in which the carboxylic acid groups are in cis- or trans-positions. The cis- and trans-isomers can be separated by crystallization with or without a solvent, for example, n-heptane, or by distillation. The cis-isomer tends to blend better; however, the trans-isomer has higher melting and crystallization temperatures and is especially preferred. Mixtures of the cis- and trans-isomers are useful herein as well, and preferably when such a mixture is used, the trans-isomer will comprise at least about 75 parts by weight and the cis-isomer will comprise the remainder based upon 100 parts by weight of cis- and trans-isomers combined.

When a mixture of isomers or more than one diacid is used, a copolyester or a mixture of two polyesters may be used as the cycloaliphatic polyester resin in the present invention.

Chemical equivalents of these diacids include esters, alkyl esters, e.g., dialkyl esters, diaryl esters, anhydrides, acid chlorides, acid bromides, and the like. The preferred chemical equivalents comprise the dialkyl esters of the cycloaliphatic diacids, and the most preferred chemical equivalent comprise the dimethyl ester of the acid, particularly dimethyl-trans-1,4-cyclohexanedicarboxylate.

Dimethyl-1,4-cyclohexanedicarboxylate can be obtained by ring hydrogenation of dimethylterephthalate, and two isomers having the carboxylic acid groups in the cis- and trans-positions are obtained. The isomers can be separated, the trans-isomer being especially preferred. Mixtures of the isomers are suitable as explained above and preferably in the ratios as explained above.


The polyester resins of the present invention are typically obtained through the condensation or ester interchange polymerization of the diol or diol equivalent component with the diacid or diacid chemical equivalent component and having recurring units of the Formula 3:



Formula 3

wherein R¹³ represents an alkyl or cycloalkyl radical containing 2 to 12 carbon atoms and which is the residue of a straight chain, branched, or cycloaliphatic alkane diol having 2 to 12 carbon atoms or chemical equivalents thereof; and R¹⁴ is an alkyl or a cycloaliphatic radical which is the decarboxylated residue
 5 derived from a diacid, with the proviso that at least one of R¹³ or R¹⁴ is a cycloalkyl group.

A preferred cycloaliphatic polyester is poly(1,4-cyclohexane-dimethanol-1,4-cyclohexanedicarboxylate) (PCCD) having recurring units of formula 4:



Formula 4

wherein R¹³ is a cyclohexane ring, and wherein R¹⁴ is a cyclohexane ring derived
 10 from cyclohexanedicarboxylate or a chemical equivalent thereof and is selected from the cis- or trans-isomer or a mixture of cis- and trans-isomers thereof.

Cycloaliphatic polyester resins of the instant invention can be generally made following the teachings of, for example, U.S. Patent 2,465,319. The reaction is generally run in the presence of a suitable catalyst such as a tetra(2-ethyl
 15 hexyl)titanate, in a suitable amount, typically about 50 to 400 ppm of titanium based upon the final product.

Poly(1,4-cyclohexanedimethanol-1,4-cyclohexanedicarboxylate), herein abbreviated as PCCD, film shows excellent adhesion to polycarbonate resin

substrates, including polycarbonate blends with other thermoplastics, without using a primer. BPA polycarbonates are preferred substrate resins for use in this invention. Films comprising blends of PCCD and polycarbonates also be used as the cap layers of this invention. They exhibit excellent primerless adhesion to a polycarbonate substrate when the film is bonded to the polycarbonate by lamination, hot pressing, in mold decoration, melt extrusion of the polycarbonate on to a PCCD film, coextrusion of both resins, or any similar bonding or joining technique known to those in the art. An In mold decoration process is described in "Modern Plastics " Feb. 1998, p34.


10 The cap layer of the invention may also comprise a blend of polycarbonate resin with cycloaliphatic polyester resin. Addition of the PC resin to the cycloaliphatic polyester allows retention of clarity and increases the heat distortion temperature (HDT) of the cap layer allowing it be used in a wider range of articles. PC addition to the cycloaliphatic cap layer resin may also
15 beneficially alter its melt strength and crystallization behavior. A preferred embodiment provides a blend of cycloaliphatic polyester resin, and cycloaliphatic polyesters with increased stiffness containing rigid segments such as adamantane, neopentyl or norbornene segments.

A preferred embodiment provides a composition wherein the
20 polycarbonate is bisphenol-A polycarbonate, the cycloaliphatic polyester resin is derived from a cycloaliphatic diol and a cycloaliphatic diacid. The preferred cycloaliphatic resin being poly (1,4-cyclohexanedimethanol-1,4-cyclohexanedicarboxylate) (PCCD), and further, wherein the ratio of the polycarbonate to PCCD is from about 60:40 to about 75:25.

25 Blends of polymers such as polycarbonate and cycloaliphatic polyesters generally contain catalyst quenchers. Catalyst quenchers are agents which inhibit activity of any catalysts which may be present in the resins. Catalyst quenchers

are described in detail in U.S. Patent 5,441,997. It is critical to chose the correct quencher to avoid color formation and loss of clarity in the cap layer when it consists of a cycloaliphatic polyester blended with PC resin.

A preferred class of quenchers are those which provide a transparent and colorless product. Typically, such stabilizers are used at a level of 0.001-10 weight percent and preferably at a level of from 0.005-2 weight percent. The preferred stabilizers include an effective amount of an acidic phosphate salt; an acid, alkyl, aryl or mixed phosphite having at least one acidic hydrogen; a Group IB or Group IIB metal phosphate salt; a phosphorus oxo acid, a metal acid pyrophosphate or a mixture thereof. The suitability of a particular compound for use as a stabilizer and the determination of how much is to be used as a stabilizer may be readily determined by preparing a mixture of the polyester resin component, and polycarbonate resin with and without the particular compound and determining the effect on melt viscosity, gas generation, color or the formation of interpolymer. The acidic phosphate salts include sodium dihydrogen phosphate, mono zinc phosphate, potassium hydrogen phosphate, calcium dihydrogen phosphate and the like. The phosphites may be of the formula:



where R¹, R² and R³ are independently selected from the group consisting of hydrogen, alkyl and aryl with the proviso that at least one of R¹, R² and R³ is hydrogen.

The phosphate salts of a Group IB or Group IIB metals of the periodic table include zinc phosphate, copper phosphate and the like. The phosphorus

oxo acids include phosphorous acid, phosphoric acid, polyphosphoric acid or hypophosphorous acid.

The polyacid pyrophosphates may be of the formula:



- 5 wherein M is a metal, x is a number ranging from 1 to 12 and y is a number ranging 1 to 12, n is a number from 2 to 10, z is a number from 1 to 5 and the sum of (xz) + y is equal to n + 2. The preferred M is an alkaline or alkaline earth metal.

- 10 The most preferred quenchers are oxo acids of phosphorous or acidic organo phosphorus compounds. Inorganic acidic phosphorus compounds may also be used as quenchers, however they may result in haze or loss of clarity. Most preferred quenchers are phosphoric or phosphorous acid.

- 15 Cycloaliphatic polyester resins have been found to have better weatherability than polycarbonate alone. Ultraviolet light absorbers are used to improve the polycarbonate light stability. Inclusion of a light stabilizer in a cycloaliphatic polyester layer on the polycarbonate surface has been found to provide additional light stability for the polycarbonate resin.

- 20 The ultraviolet light absorbers (UVA) useful in the present invention are those which are generally compatible with polycarbonates. Preferred are benzotriazole, benzophenone, triazine, cyanoacrylate, dibenzoylresorcinol, and oxanilide based UVA. Incorporation of a light stabilizing additive in the PCCD composition, i.e., cycloaliphatic polyester alone or a polycarbonate - cycloaliphatic polyester blend, provides additional benefits in weatherability.

- 25 In addition to UV absorbers, hindered amine light stabilizers (HALS) also contribute to increased weatherability of the structure.

Illustrative ultraviolet radiation absorbing compounds include 2-(benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol, 2-(benzotriazol-2-yl)-4-methylphenol, 2-hydroxy-4-octyloxy benzophenone, 2-hydroxy-4-methoxybenzophenone, ethyl-2,2-diphenyl-1-cyanoacrylate, 2'-ethylhexyl - 2, 2-diphenyl-1-cyanoacrylate, 2-(2'-hydroxy-4'-octyloxy) bis-4,6-(2',4'-dimethylphenyl) triazine, 2-ethyl- 2'-ethoxy oxalanide, bis [2-hydroxy-5-methyl-3- (benzotriazol-2-yl) phenyl] - methane, bis[2 - hydroxy- 5 - t - octyl - 3 - (benzotriazol - 2 -yl) phenyl] methane, 2,2' - (1,4 - phenylene) bis [4 H - 3, 1 - benzoxazin - 4 - one], and 2 - (2' - hydroxy-4-hexyloxy) - 4,6 - diphenyltriazine.

10 Light stabilizers are incorporated in the cycloaliphatic polyester e.g., PCCD, resin in amounts of about 0.05 to about 10 weight percent.

Blends comprising polycarbonate and cycloaliphatic polyester components form one class of resin compositions which can be used to form the multilayer articles of this invention. Such blends generally contain various

15 additives such as colorants , light stabilizers, ultraviolet absorbers, and the like, in addition to quenchers. In preferred examples, the polycarbonate and the cycloaliphatic polyester resin, taken together, comprise (a) from about 70% to about 99.94% by weight of the total composition, the ratio of the polycarbonate to the cycloaliphatic polyester resin being from about 50:50 to about 90:10; (b) the

20 benzotriazole, benzophenone, triazine, cyanoacrylate, dibenzoylresorcinol, and oxanilide based UV absorber comprises from about 0.05% to about 10% by weight of the total composition; and (c) the catalyst quencher comprises from about 0.001% to about 3% by weight of the total composition.

Other preferred embodiments of the instant invention provide a

25 composition wherein the benzotriazole, benzophenone, triazine, cyanoacrylate, dibenzoylresorcinol, and oxanilide based UVA comprises from about 0.3% to about 10% by weight of the total composition of the film layer. Another preferred embodiment provides a composition wherein the benzotriazole,

benzophenone, triazine, cyanoacrylate, dibenzoylresorcinol, and oxanilide based UVA comprises from about 0.3% to about 1% by weight of the total composition. Hindered amine light stabilizers, which are well known in the art, may optionally be added at 0.01 to about 1% of the total composition.

5 In another embodiment of the invention the support layer or substrate comprises an ABS type polymer or an ABS -PC blend. In general, ABS type polymers contain two or more polymeric parts of different compositions which are bonded chemically. The polymer is preferably prepared by polymerizing a conjugated diene, such as butadiene or a conjugated diene with a monomer
10 copolymerizable therewith, such as styrene, to provide a polymeric backbone. After formation of the backbone, at least one grafting monomer, and preferably two, are polymerized in the presence of the prepolymerized backbone to obtain the graft polymer. These resins are prepared by methods well known in the art.

Related ASA resins (Acrylonitrile-Styrene-Acrylate) are made in a similar
15 fashion in some cases by grafting acrylonitrile, styrene and an optionally an alkyl acrylate to an acrylic rubber. ASA may also be blended with polycarbonate to form a substrate resin.

In ABS the backbone polymer, as mentioned, is preferably a conjugated diene polymer such as polybutadiene, polyisoprene, or a copolymer, such as
20 butadiene-styrene, butadiene-acrylonitrile, or the like. Examples of dienes that may be used are butadiene, isoprene, 1,3-heptadiene, methyl-1,3-pentadiene, 2,3-dimethyl-1,3-butadiene, 2-ethyl-1,3-pentadiene; 1,3- and 2,4-hexadienes, chloro and bromo substituted butadienes such as dichlorobutadiene, bromobutadiene, dibromobutadiene, mixtures thereof, and the like. A preferred conjugated diene
25 is butadiene.

One monomer or group of monomers that may be polymerized in the presence of the prepolymerized backbone are monovinylaromatic hydrocarbons.

Examples of the monovinylaromatic compounds and alkyl-, cycloalkyl-, aryl-, alkaryl-, aralkyl-, alkoxy-, aryloxy-, and other substituted vinylaromatic compounds include styrene, 3-methylstyrene; 3,5-diethylstyrene, 4-n-propylstyrene, alpha-methylstyrene, alpha-methyl vinyltoluene, alpha-
5 chlorostyrene, alpha-bromostyrene, dichlorostyrene, dibromostyrene, tetrachlorostyrene, mixtures thereof, and the like. The preferred monovinylaromatic hydrocarbons used are styrene and alpha -methylstyrene.

A second group of monomers that may be polymerized in the presence of the prepolymerized backbone are acrylic monomers such as acrylonitrile,
10 substituted acrylonitrile and/or acrylic acid esters, exemplified by acrylonitrile, and alkyl acrylates such as methyl methacrylate. Examples of such monomers include acrylonitrile, ethacrylonitrile, methacrylonitrile, alpha -chloroacrylonitrile, beta -chloroacrylonitrile, alpha -bromoacrylonitrile, and beta -bromoacrylonitrile, methyl acrylate, methyl methacrylate, ethyl acrylate, butyl
15 acrylate, propyl acrylate, isopropyl acrylate, and mixtures thereof. The preferred acrylic monomer is acrylonitrile and the preferred acrylic acid esters are ethyl acrylate and methyl methacrylate.

In the preparation of the graft polymer, the conjugated diolefin polymer or copolymer exemplified by a 1,3-butadiene polymer or copolymer comprises
20 about 50% by weight of the total graft polymer composition. The monomers polymerized in the presence of the backbone, exemplified by styrene and acrylonitrile, comprise from about 40 to about 95% by weight of the total graft polymer composition.

The second group of grafting monomers, exemplified by acrylonitrile,
25 ethyl acrylate or methyl methacrylate, of the graft polymer composition, preferably comprise from about 10% to about 40% by weight of the total graft copolymer composition. The monovinylaromatic hydrocarbon exemplified by

styrene comprise from about 30 to about 70% by weight of the total graft polymer composition.

In preparing the polymer, it is normal to have a certain percentage of the polymerizing monomers that are grafted on the backbone combine with each other and occur as free copolymer. If styrene is utilized as one of the grafting monomers and acrylonitrile as the second grafting monomer, a certain portion of the composition will copolymerize as free styrene-acrylonitrile copolymer. In the case where alpha -methylstyrene (or other monomer) is substituted for the styrene in the composition used in preparing the graft polymer, a certain percentage of the composition may be an alpha -methylstyrene-acrylonitrile copolymer. Also, there are occasions where a copolymer, such as alpha -methylstyrene-acrylonitrile, is added to the graft polymer copolymer blend. When the graft as polymer-copolymer blend is referred to herein, it is meant optionally to include at least one copolymer blended with the graft polymer composition and which may contain up to 90% of free copolymer.


Optionally, the elastomeric backbone may be an acrylate rubber, such as one based on n-butyl acrylate, ethylacrylate, 2-ethylhexylacrylate, and the like. Additionally, minor amounts of a diene may be copolymerized in the acrylate rubber backbone to yield improved grafting with the matrix polymer.

The preferred ABS material for the support layer is Cylolac® resin available from the GE Plastics component of General Electric Company.

Additional material for the support layer include polycarbonate and ABS blends. The polycarbonate and ABS, respectively, are as before described with Lexan® resin and Cylolac® resin being available from GE Plastics component of General Electric Company. The ABS/polycarbonate resin is also available from GE Plastics as Cyloloy® resin. Suitable blends contain about 15 to about 85

weight percent polycarbonate and about 15 to about 85 weight percent ABS resin.

Other preferred substrate layers are polyester components include crystalline polyesters such as polyesters derived from aliphatic or cycloaliphatic
 5 diols, or mixtures thereof, containing from 2 to about 12 carbon atoms and at least one aromatic dicarboxylic acid. Preferred polyesters are derived from an aliphatic diol and an aromatic dicarboxylic acid having repeating units of the following general formula:

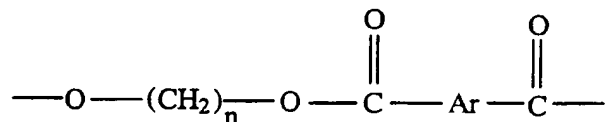

wherein n is an integer of from 2 to 6. Ar is a C₆-C₂₀ aryl radical comprising a
 10 decarboxylated residue derived from an aromatic dicarboxylic acid.

Examples of aromatic dicarboxylic acids represented by the decarboxylated residue Ar are isophthalic or terephthalic acid, 1,2-di(p-carboxyphenyl)ethane, 4,4'-dicarboxydiphenyl ether, 4,4' bisbenzoic acid and mixtures thereof. All of these acids contain at least one aromatic nucleus. Acids
 15 containing fused rings can also be present, such as in 1,4- 1,5- or 2,6- naphthalene dicarboxylic acids. The preferred dicarboxylic acids are terephthalic acid, isophthalic acid, naphthalene dicarboxylic acid or mixtures thereof.

The most preferred polyesters are poly(ethylene terephthalate) (PET), and poly(butylene terephthalate) (PBT), poly(ethylene naphthanoate) (PEN),
 20 poly(butylene naphthanoate) (PBN), poly(propylene terephthalate) (PPT), or mixtures of these resins.

Also contemplated herein are the above polyesters with minor amounts, e.g., from about 0.5 to about 15 percent by weight, of units derived from aliphatic

acids and/or aliphatic polyols to form copolyesters. The aliphatic polyols include glycols, such as poly(ethylene glycol) or poly(butylene glycol). Such polyesters can be made following the teachings of, for example, U.S. Pat. Nos. 2,465,319 and 3,047,539.

5 The preferred poly(1,4-butylene terephthalate) resin used in this invention is one obtained by polymerizing a glycol component at least 70 mol %, preferably at least 80 mol %, of which consists of tetramethylene glycol and an acid component at least 70 mol %, preferably at least 80 mol %, of which consists of terephthalic acid, and polyester-forming derivatives therefore.

10 The polyesters used herein have an intrinsic viscosity of from about 0.4 to about 2.0 dl/gm. measured in a 60:40 phenol/tetrachloroethane mixture or similar solvent at 23-30° C. VALOX ®315 polyester is particularly suitable for this invention. Preferably intrinsic viscosity is about 1.1 to about 1.4 dl/gm.

Blends of polyesters may also be employed in the composition. Preferred
15 polyesters blends contain poly(ethylene terephthalate) and poly(1,4-butylene terephthalate). When blends of these preferred components are employed the polyester resin component can comprise from about 5 to about 50 parts by weight poly(ethylene terephthalate) and from about 95 to about 50 part by weight poly(1,4-butylene terephthalate) based on 100 parts by weight of both
20 components combined.

Also, blends of relatively low molecular weight polybutylene terephthalate resin may be used with a relatively high molecular weight polybutylene terephthalate as set forth in U.S. patent 5,589,530 to Walsh. The low molecular weight polybutylene terephthalate is a PBT resin having a melt
25 viscosity of less than 600 poise at 250°C.

The aromatic polyesters are the reaction products of aliphatic diols and aromatic dicarboxylic acids, or their derivatives. Preferred diols are C2-C12 diols; especially preferred are ethylene glycol, propylene glycol and butylene glycol. Preferred dicarboxylic acid are derived from benzene or naphthalene
5 rings. Most preferred diacids are iso and tere phthalic acid or naphthalene dicarboxylic acid, especially the 2, 6 naphthalene dicarboxylate.

Blends of polycarbonate with polyesters are also preferred substrates. As indicated earlier, the preferred polycarbonate is bisphenol-A polycarbonate. When blends of these preferred components are employed the polyester resin
10 component can comprise from about 1 to about 99 parts by weight polyester and from about 99 to about 1 part by weight polycarbonate based on 100 parts by weight of both components combined.

These materials especially when further blended with rubbery impact modifiers provide resins with excellent impact and stiffness. The preferred
15 polycarbonate resins are as described previously with BPA-PC being most preferred. Impact modifiers especially suitable for optional inclusion in the aromatic polyester polycarbonate blends are core shell modifiers such and MBS (methacrylate-butadiene-styrene) copolymers and methylmethacrylate-butyl acrylate (acrylic rubber) core shell rubbers as well as acrylonitrile styrene graft
20 polybutadiene rubbers (ABS rubber).

Thermoplastic resins comprising a blend of polycarbonate and polyesters resin are available from General Electric Company Plastics Division under the trademark Xenoy®.

Articles of the invention may also use polyphenylene ether and
25 polyphenylene ether/polystyrene blends as the substrate. The polyphenylene ether resins can be homopolymers or copolymers and are preferably derived from the polymerization of alkyl or aryl substituted phenols, 2,6 xylenol and

2,3,6 trimethyl phenol are especially preferred. The polystyrene resins used in blends with the polyphenylene ethers can be alkyl, aryl or halogen substituted. They may further be modified with rubber especially butadiene based rubber. Most preferred are polystyrene, alpha-methyl polystyrene, para-methyl
5 polystyrene and high impact modified polystyrene known as HIPS. Polyphenylene ether polystyrene blends are sold by GE Plastics under the Noryl® trade name.

The composite article comprising a base or substrate of a thermoplastic resin such as a polycarbonate, polyester, or an ABS resin or a polycarbonate
10 resin blend and an adherent layer of cycloaliphatic polyester film is preferably, optically transparent and has improved weather resistance when compared to the substrate, e.g., polycarbonate, surface alone. In addition to a transparency of greater than 87%, the polycarbonate cycloaliphatic polyester composite is characterized by other properties such as good impact strength, low water
15 absorption, chemical resistance to methanol, ethyl acetate, and MEK, low shrinkage, good processability, printability, and cutability.

The substrate resin may also contain other additives such as colorants, flame retardant chemicals, glass fibers, mineral fillers such as talc, clay, barium sulfate, mica; glass spheres as well as thermal stabilizers, lubricants and other
20 processing aids.

In a preferred method for forming the multilayer articles of this invention a surface layer is formed by coextruding polycarbonate and cycloaliphatic as a composite film. The substrate is then injected onto the polycarbonate side of the composite during a subsequent molding operation. The resulting multilayer
25 article comprises a substrate (in this case PC), an intermediate film of the same material as the substrate, e.g., polycarbonate, and a top layer of a cycloaliphatic polyester, such as PCCD. The composite film can be any suitable and convenient

thickness. For example the polycarbonate film can be about 10 mils thick and the PCCD film can be about 5 mils thick, the substrate can be thicker. Any ink or decorative layer can be printed on the surface of the laminated polycarbonate or cycloaliphatic polyester film.

- 5 The articles of the invention can be formed by various processes: for instance; compression molding, multilayer blow molding, coextrusion of sheet or film, injection over molding, insertion blow molding and other methods.

 The multilayer articles of the invention can have a variety of uses in business equipment, hand held communication devices, pagers, telephones,
10 automobiles in applications such as body panels , interior and exterior trim and bumpers. The articles can also be used , glazing, membrane switches, packaging, building and construction.

 The following examples are presented to illustrate the invention and should not be construed to limit the scope of the invention.

15 Example 1.

 A blend of 60% PCCD and 40 % PC film 13-15 mil thick was prepared with 0.05% [45%] aqueous phosphorous acid. The extrusion conditions are listed in Table 1.

Table 1. Example of Extrusion Conditions for PC/PCCD Blend

Extruder Diameter	2 in.
Drying Temperature (°F)	200
Drying Time (Hours)	6
Moisture Content (%)	<0.020
Extruder Temperatures (°F)	Set/Actual
Zone 1	440/441
Zone 2	460/462
Zone 3	470/473

Zone 4	485/486
Zone 5	485/486
Pipes and Clamps Temperature (°F)	480/477
Melt Temperature (°F)	487
Pressure (psi)	1450
Screw RPM	30
Extruder Amps	18
Line Speed (fps)	8.1
Die Lips (F)	480
Roll Stack Temp (°F)	170/171
Feed Block Adapter Temperature (°F)	480/481

The resulting 13-15 mil film was optically transparent with good appearance.

Example 2:

A 10 mil optically transparent 100 % PCCD film was also prepared. Prior to extrusion the PCCD resin was dried at 200°F for 4-5 hours. The dry resin was
5 then put into a 1.25" diameter single stage screw extruder with barrel settings set between 425°F and 450°F. The L/D ratio was 24 and the screw had a compression ratio of 3.5, the screw speed was 55 RPMs and power was at 27 amps on a line moving at a rate of 7.2 fpm. Short residence times were desirable to avoid thermal degradation. The resulting film was optically transparent.

10 In Mold Decorating:

The PCCD film sample from the prior example was treated with Teflon tape on both sides for the first one inch along the width of a 4" x 6" film. The
film was then placed into the mold of an injection molding machine. Lexan 140
grade polycarbonate resin was then injected into the mold to form a layered
15 composite of PC resin and PCCD film. The experimental conditions for the Nissei
160 ton press injection molder are shown in Table 2.

Table 2. Experimental Conditions for In Mold Decorating PCCD Film

Injection Molding Conditions:**Barrel set Temps:**

Nozzle	585° F
Front	585° F
Middle	585° F
Rear	525° F

Tool set Temps:

Moveable 175° F/Fixed 175° F

Times:

Inject	10 sec.
Cool	22 sec.
Cycle	1 sec.

Injection Velocity

~4.5 in./sec (ram) (75%)

Hold Pressure

30% Mach. Cap. (625 psi)

Velocity to Pressure**Switch Point**

10 mm

Shot Size

42 mm

Cushion

9 mm

Screw Speed

80 rpm

Screw decompression

1 mm

Screw Back Pressure

0

Adhesion Testing:

Once the layered structure was made the adhesion could be tested. A one inch wide adhesion test sample was cut from the plaque and mounted in a screw driven model 6025 Instron running Acquilin software. The Teflon PTFE flap
 5 provided a flap which could be easily grasped by the Instron which was used to perform 90 degree peel tests. The rate of peel was 0.0067 in/sec.

The adhesion test showed that the PCCD to PC adhesion was greater than 22 lb./in., before the film failed by breaking. In addition, upon viewing the film under magnification a clean interface is observed which would indicate low
 10 distortion upon printing and thermoforming.

Tear Strength:

The tear strength of a 10 mil 100 % PCCD film was tested along with a PC film and a PC/PCCD blend all of the same thickness. It was found that the PCCD film showed a better tear strength of 69 g/mil than did PC film which had a tear strength of 42 g/mil. A blend of 90% PC and 10% PCCD film was also tested and
5 found to have an intermediate tear strength of 48 g/mil. A 15 mil multilayer article of PCCD coextruded over PC also showed good tear resistance in practical tests.

Heat Deflection Temperature (HDT)

Since PCCD has a low heat deflection temperature of 125° F for a 10 mil
10 film, it is shown that it can be blended with higher heat resistant materials to improve its HDT. Table 3. Shows PCCD being blended with polycarbonate resin to reach heat deflection temperatures of 250F with only 50 weight percent polycarbonate.

Table 3. The HDT of PCCD Can be Improved with Small Amounts of PC Resin.

Run #	PCCD (wt%)	PC (wt%)	HDT (°F)
1	100	0	125
2	0	100	250
3	90	10	150
4	70	30	180
5	50	50	250

Oxygen (TO₂) Barrier Performance:

15 The amount of PCCD in the PCCD/PC blend formulation can be used to control the rate of oxygen transmittance through the film, while maintaining overall clarity and chemical resistance. Table 4. Shows the relative performance of PC film, PCCD film and a 90/10 PC/PCCD film to oxygen transmittance rates.

Table 4. Oxygen Transmittance Rates of PCCD, PC and Blend Films

Film material	TO ₂ (73 F) cc O ₂ * mil/100 in ² /day
PC	219
PCCD	147
90/10 PC/PCCD	145

Example 3:

Ink Adhesion / Diecutability

A 60 PCCD/ 40 PC blend film was screen printed with a black ink made by Nazdar Company (Black, 9624). No adhesion promoters or treatments were used. The print adhesion was then tested by a crosshatch adhesion test (ASTM D3559) and was found to have a 5B rating.

The diecutting process involves stamping out the film into the shape of the mold. Failure is marked by hairline cracks along the edges or slivers of polymer along the cut surface, often referred to as 'angel hair' by those skilled in the art. The film printed and cut according to acceptable standards.

Example 4.

An ABS resin (Cyclac® GPM5500) and an ABS/PC (Cycloy® C6200) blend made by the General Electric Company was used to in mold decorate a 60 % PCCD with 40 % 130 grade PC blend film (60/40 PCCD/PC). The 60/40 PCCD/PC film was thermoformed and diecut to fit within a three dimensional mold. In mold decorated samples were prepared with each the Cyclac GPM5500 and the Cycloy C6200 resins. The resulting parts were laminated parts containing the 60/40 PCCD/PC film on one side. The final parts had an

acceptable aesthetic appearance. The conditions for in mold decorating the film are shown in table 5, below.

Table 5. In Mold Decorating Conditions for Cycolac ABS and Cycoloy ABS/PC Resins

		Cycolac GPM 5500	Cycoloy C6200
Barrel set Temps:			
	Nozzle	465° F	585° F
	Front	455° F	585° F
	Middle	450° F	585° F
	Rear	440° F	525° F
Tool set Temps:			Moveable 175°F Fixed 175° F
Times:			
	First Injection	2.81 sec	2.85 sec.
	Second Injection	1.02 sec.	1.02 sec.
	Cure	16 sec	16 sec.
	Mold Open	4 sec	4 sec.
	Total Cycle	41 sec	41 sec.
Injection Velocity		1.2 in./sec	1.2 in./sec
Pressure, psi			
	First Injection	1700	2000
	Second Injection	200	200
	Back	75	75
	Clamp	200	200
Shot Size		1.65	1.80
Extruder Rate		150 rpm	150 rpm

The samples were tested to determine the adhesion between the base resin and the film using a one-inch strip cut from the laminate and an Instron. A 90 degree adhesion peel test showed that the Cylolac GPM 5500 resin with the 60/40 PCCD/PC film had an average adhesion of 1.2 lb/in while the Cyloloy

5 C6200 had an average adhesion of 11.2 lb/in.

Example 5.

A 50% Polycarbonate (PC)/50% PCCD film blend and a 100 % PCCD film both containing benzotriazole stabilizer, Cyasorb UV 5411® as a UV light absorber (UVA) were prepared. The UVA was thoroughly mixed into the resin

10 pellet with 0.05% phosphorous acid quencher and extruded under the conditions listed in table 6.

Table 6. Composition and Extrusion Conditions for Making PCCD Film and 50/50 PC/PCCD Film

Resin Composition PCCD Film:

PCCD (pellets)	99.0 pbw	2247.3 g
Cyasorb 5411.	1.00 pbw	22.7 g
Phosphorous acid	0.05 pbw	1.14 g

Extruder conditions PCCD Film:

Resin dried at 90C >4 hr.

Temperature sets:

Rear	400F
Middle	440F
Front	440F
Nozzle	450F
Melt-Temp.	446F

Other Conditions:

Motor amps	~ 3.0
Roll stack	145F
RPM's	75
Feeder speed	5.0
Roll speed	5.0

Die press.	0-500psi	
Sheet Die	450F	
Film thickness	~0.005"	
Resin Composition PC/PCCD Film:		
PC-135 (pellets)	49.48 pbw	1123.1 g
PCCD (pellets)	49.48 pbw	1123.1 g
Cyasorb 5411	1.00 pbw	22.7 g
Phosphorous acid	0.05 pbw	1.14 g

Extruder conditions:

Resin dried at 100C >4 hr.

Temperature sets:

Rear	450F
Middle	470F
Front	470F
Nozzle	500F
Melt-Temp.	496F

Other Conditions:

Motor amps	~ 3.0
Roll stack	175F
RPM's	75
Feeder speed	3.0
Roll speed	5.0
Die press.	0-500psi
Sheet Die	470F
Film thickness	~0.005"

After the films were prepared the thickness, transmittance, YI, and haze were measured. The results are shown in the table below. The transmittance, YI, and haze were measure using a Gardner Colorimeter in the transmittance mode.

Table 7. Film Thickness, Transmittance, YI and Haze of the PCCD and 50/50 PC/PCCD films prepared.

	Transmittance	YI	% Haze	Thickness (mil)
PCCD Film	92.1	3.1	0.8	8.8
PC/PCCD Film	91.4	2.0	6.2	8.3

These film samples were then in mold decorated with Lexan® 125 Resin (PC), Xenoy ® 1102 Resin (46/40/14 PC/Polybutylene terephthalate/MBS blend, Noryl PX1005® resin (a polystyrene (PS) modified polyphenylene oxide (PPO)blend)) and Valox 315® resin (PBT) to make 4" x 6" x 0.0625" plaques. A Nissei 160 ton press under the conditions shown in table 8 was used to make these samples.

Table 8. Conditions for In Mold Decorating Films with a Nissei 160 tons Injection Molding Machine.

Resin	Barrel Set Temperatures	Tool Temperature
PBT (unpigmented)	Nozzle- 490 F Front- 490 F Middle- 490 F Rear- 490 F	170 F/170 F
PC/PBT/MBS (Black)	Nozzle- 500 F Front- 500 F Middle- 500 F Rear- 475 F	150 F/150 F
PPO/PS (Black)	Nozzle- 540 F Front- 540 F Middle- 540 F Rear- 525 F	160 F/160 F
PC (Clear, unstabilized)	Nozzle- 555 F Front- 555 F Middle- 555 F Rear- 525 F	170 F/170 F

The laminate samples produced from this experiment were tested for chemical resistance, interlayer part adhesion and weatherability.

Chemical Resistance

The laminated plaque was tested for chemical resistance using a 50% Ethyl Acetate/50% Methanol mixture. The test was performed by placing a saturated piece of filter paper approximately 1" in diameter on the plaque (film side). The sample was then covered with a watch glass to prevent evaporation. After 5, 15, 30, 45 and 60 minutes the samples were checked for failure i.e. blistering or cracking. The table below shows the results of each laminated plaques performance.

Table 9. Results of Chemical Resistance Testing using a 50% Ethyl Acetate/50% Methanol Mixture

Controls:

Material	Chemical Resistance
PC	Failed @ 5 min.
PPO/PS	Discolored @ 5 min
PC/PBT/MBS	Some Pitting @ 30 minutes
PBT	Pass @ 30 & 60 min

Laminated Samples

100% PCCD Film with UVA over:

PC	Pass @ 30 & 60 min
PPO/PS	Pass @ 30 & 60 min
PC/PBT/MBS	Pass @ 30 & 60 min
PBT	Pass @ 30 & 60 min

50/50 PC/PCCD Film with UVA over:

PC	Pass @ 30 & 60 min (some discoloration)
PPO/PS	Pass @ 30 & 60 min
PC/PBT/MBS	Pass @ 30 & 60 min

PBT (some discoloration)
Pass @ 30 & 60 min

Interlayer Adhesion Tests

An Instron 90 degree adhesion peel test was utilized to test the adhesion between the film and the injection molding resin. An area of the plaque was masked before in mold decorating to provide a tab to grab for the adhesion tests.

- 5 One inch strips were cut from the center of each plaque. The samples was then mounted in the Instron and pulled apart at a rate of 0.016" per sec. The adhesion was reported in pounds per linear inch. The following table shows the results of these adhesion tests.

Table 10. Results of 90 Degree Adhesion Tests

	Average Adhesion (lb/in)	Maximum Adhesion (lb/in)
100% PCCD Film with UVA over:		
PC*	3.76	13.75
PPO/PS	0.35	1.00
PC/PBT/MBS*	7.30	32.63
PBT	0.76	1.62

50/50 PC/PCCD Film with
UVA over:

PC*	3.87	22.49
PPO/PS	0.40	1.46
PC/PBT/MBS*	18.11	35.90
PBT	0.51	1.29

* Last reported measurement before sample broke

Weatherability

The xenon arc accelerated testing was performed on a Ci35a xenon arc Weather-ometer® using a modified SAE J1960 protocol. The modification consisting of using a type S borosilicate filter as the inner and outer filters. The irradiance level was 0.77 W/m² at 340 nm, the black panel temperature was between 70-73° C, the dry bulb temperature was 45° C with a wet bulb depression of 10° C (50% relative humidity). The cycle was 160 min. light, 5 minutes dark, 15 minutes dark with water spray. This cycle accumulates 2.46 KJ/m² at 340 nm per hour of operation. Samples were exposed to 598.5 KJ/m² under these conditions.

The yellowness index (YI), haze and transmittance measurements were taken using a Gardner XL-835 colorimeter. Gloss measurements were also collected at a 60 degree angle on the irradiante/cycloaliphatic polyester side as per ASTM D523.

The results of these tests are shown in table 11.

Table 11. Weathering Results of Prepared Samples after 589.5 KJ/m² Exposure in Xenon Arc

Sample	Initial Gloss	598.5 KJ/m ² Gloss	% Gloss Retention
PC/PBT/MBS Control	98.5	0.9	less than 1%
with PCCD laminate	92.2	99.7	100%
with PC/PCCD laminate	94.3	96.9	100%
PBT Control	105.9	68.0	64%
with PCCD laminate	88.0	91.0	100%
with PC/PCCD laminate	104.5	95.2	91.1%
PPO/PS Control	99.4	0.1	less than 1%
with PCCD laminate	89.3	89.8	100%
with PC/PCCD laminate	93.5	96.9	100%

	Change in YI (Final - Initial)
PC Control	6.8
with PCCD laminate	4.3
with PC/PCCD laminate	3.6
Example 6.	

A sheet was coextruded having a 70 wt. % PCCD/30 wt. % 130 grade PC blend cap layer and a 100% 100 grade PC substrate. The cap layer was 0.005 in. thick and the PC substrate was 0.095 in. thick. The resulting sheet was
 5 transparent and colorless. The layers showed excellent adhesion, good toughness and solvent resistance.

Table 12. Coextrusion Conditions for 70/30 PCCD/PC Cap Layer Over 100 % PC Substrate.

Main Extruder:

Diameter	1.25"
L/D	24
Barrel Temp (F)	470-490
Residence Time (min)	3-6

Satellite Extruder:

Diameter	1.00"
L/D	30
Barrel Temp (F)	360
Residence Time (min)	15-20

Line Speed (fpm) 1.4

In a preferred embodiment of the invention a thin film of top layer material such as PCCD is coextruded with a thicker substrate material such as
 10 PC. The bottom of the polycarbonate layer is imprinted with an ink image. The decorative two layer composite is then placed in a mold and a layer of substrate

material, in this case, the PC is injection molded to the printed side of what is now the layer of a four layer structure.

WHAT IS CLAIMED IS:

1. A multilayer article which comprises a thermoplastic resin substrate layer and an adherent layer comprising a cycloaliphatic polyester on at least one surface of the substrate.

2. A multilayer article which comprises a substrate comprising a thermoplastic resin layer and an adherent layer comprising a cycloaliphatic polyester on at least one surface of the substrate wherein the cycloaliphatic polyester surface layer shows a 60 degree gloss change of less than or equal to 50% after 600 KJ/m² exposure to a J1960 weathering test using borosilicate glass filtered xenon arc light.

3. A multilayer article which comprises a substrate comprising a thermoplastic resin layer and an adherent layer comprising a cycloaliphatic polyester on at least one surface of the substrate wherein the peel strength between the layers is greater than or equal to 5 lbs/in.

A multilayer article which comprises a substrate comprising a thermoplastic resin layer and an adherent layer comprising a cycloaliphatic polyester on at least one surface of the substrate where in the cycloaliphatic polyester surface of the article resists cracking or blistering after 60 minutes exposure to a 1:1 mixture of ethyl acetate and methanol.

5. An article according to claim 1 in which the thermoplastic resin substrate layer is a polycarbonate resin, an ABS resin, an ASA resin, a polyester, a polyphenylene ether or polyphenylene ether/polystyrene blend, or a blend comprising a polycarbonate resin with an ABS, ASA or aromatic polyester resin.

6. An article according to claim 5 in which the substrate layer is polycarbonate or a polycarbonate containing blend.

7. An article according to claim 6 in which the substrate layer blend comprises from about 15 to about 85 weight percent polycarbonate and from about 15 to about 85 weight percent ABS, ASA or polyester resin.

8. An article according to claim 1 in which the substrate layer further contains 1-50% of the cycloaliphatic polyester cap layer.

9. An article according to claim 1 where the adherent cap layer is a blend of polycarbonate with cycloaliphatic polyester.

10. An article according to claim 1 in which the adherent cap layer is a blend of polycarbonate and cycloaliphatic polyester derived from a cycloaliphatic diol and a cycloaliphatic diacid.

11. An article according to claim 1 in which the cycloaliphatic polyester is poly(1,4 - cyclohexane dimethanol - 1,4 - cyclohexanedicarboxylate)

12. An article according to claim 9 in which the amount of polycarbonate in the polycarbonate - cycloaliphatic poly ester blend of the adherent cap layer is from about 1 to about 50 percent by weight of the blend.

13. An article according to claim 9 which further comprises an acidic phosphorus quencher,

14. An article according to claim 13 wherein the acidic phosphorus quencher is chosen from the following group: phosphorous acid, phosphoric acid, acidic organo phosphates, and acidic organo phosphites.

15. An article of claim 1 wherein the substrate layer is a polycarbonate or a blend of polycarbonate with ABS, ASA or a polyester resin.

16. An article according to claim 9 in which the blend comprises polycarbonate, a cycloaliphatic polyester, and a UV absorber.

17. An article according to claim 16 in which the UV absorber is selected from the group consisting of 2-(benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol, 2-(benzotriazol-2-yl)-4-methylphenol, 2-hydroxy-4-octyloxy benzophenone, 2-hydroxy-4-methoxybenzophenone, ethyl-2,2-diphenyl-1-cyanoacrylate, 2'-ethylhexyl - 2, 2-diphenyl-1-cyanoacrylate, 2-(2'-hydroxy-4'-octyloxy) bis-4,6-(2',4'-dimethylphenyl) triazine, 2-ethyl- 2'- ethoxy oxalanide, bis [2-hydroxy-5-methyl-3- (benzotriazol-2-yl) phenyl] - methane, bis[2 - hydroxy- 5 -t - octyl -3 - (benzotriazol -2 -yl) phenyl] methane, 2,2' - (1,4 - phenylene) bis [4 H - 3, 1 - benzoxazin -4 -one], and 2 - (2' - hydroxy) - 4,6 - diphenyltriazine.

18. An article according to claim 16 in which the UV absorber is a benzotriazole, a benzophenone, a triazine, a cyanoacrylate, a dibenzoylresorcinol, or an oxanilide.

19. An article according to claim 16 in which the UV absorber is a dibenzoylresorcinol.

20. An article according to claim 19 in which the dibenzoyl resorcinol is 4,6-dibenzoylresorcinol, bis(2,6-dihydroxy-3,5-dibenzoylphenyl)methane, or 2-(3-triethoxysilyl propyl)-4,6-dibenzoyl resorcinol.

21. A multilayer plastic article according to claim 1 comprising an intermediate decorative layer between the substrate and the cycloaliphatic polyester layer.

An article according to claim 21 in which the intermediate layer is printed on at least a portion of the inner surface of the cycloaliphatic polyester layer.

23. An article according to claim 1 comprising an thermoplastics resin, a first film of the same resin bonded to at least one surface of the substrate, and a second film comprising a cycloaliphatic polyester bonded to the outer surface of the first film.

24. An article according to claim 23 comprising a polycarbonate substrate, a polycarbonate film bonded to at least one surface of the substrate, a cycloaliphatic polyester surface film bonded to the outer surface of the polycarbonate film.

25. An article according to claim 24 in which the surface film is a blend of polycarbonate and a cycloaliphatic polyester.

26. An article according to claim 25 in which the cycloaliphatic polyester is PCCD.

27. An article of claim 5 wherein the polycarbonate -aromatic polyester substrate further contains a rubbery impact modifier.

28. An article of claim 27 wherein the rubbery substrate is chosen from the group consisting of MBS, Acrylic rubber, ASA or ABS rubbers.

29. An article of claim 1 made by a blow molding, sheet , film or profile extrusion, in mold decoration or injection molding process.

30. An article of claim 29, made by coextruding the substrate layer material and the top layer material, decorating the bottom surface of the substrate layer, and injection or blow molding another layer of substrate material to the decorative surface of the substrate.

31. A multilayer article comprising a substrate comprising a thermoplastic resin layer and an adherent layer comprising a cycloaliphatic polyester on at least one surface of the substrate wherein the polyester layer has a tear strength of 69 grams/mil.

INTERNATIONAL SEARCH REPORT

In national Application No

PCT/US 99/04542

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B32B27/36 B32B27/08 C08L67/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 193 913 A (ROSENBAUM LARRY A) 16 March 1993 (1993-03-16) claims 1,2,6,14,16,17 ---	1,11,29
X	DATABASE WPI Section Ch, Week 9041 Derwent Publications Ltd., London, GB; Class A23, AN 90-309575 XP002108852 & JP 02 219832 A (TORAY IND INC), 3 September 1990 (1990-09-03) abstract ---	1,5
Y	EP 0 595 413 A (AXXIS NV) 4 May 1994 (1994-05-04) the whole document ---	1,5, 9-11,13, 14,16, 18,29
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 July 1999

Date of mailing of the international search report

27/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Pamies Olle, S

INTERNATIONAL SEARCH REPORT

In International Application No

PCT/US 99/04542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 320 647 A (GEN ELECTRIC) 21 June 1989 (1989-06-21) the whole document ----	1,5, 9-11,13, 14,16, 18,29
A	DE 27 30 899 A (BASF AG) 1 February 1979 (1979-02-01) page 4, paragraph 3; claims; example 2 page 6, paragraph 2 page 13, paragraph 2 -----	1,5,21, 22,29,30

INTERNATIONAL SEARCH REPORT

Information on patent family members

In: International Application No

PCT/US 99/04542

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5193913	A	16-03-1993	NONE	
JP 2219832	A	03-09-1990	NONE	
EP 0595413	A	04-05-1994	BE 1006297 A AT 164549 T DE 69317727 D DE 69317727 T ES 2116401 T US 5709929 A	12-07-1994 15-04-1998 07-05-1998 03-12-1998 16-07-1998 20-01-1998
EP 0320647	A	21-06-1989	JP 1234461 A	19-09-1989
DE 2730899	A	01-02-1979	NONE	